

C-SERIES **C14,000**

The multi-directional forklift designed for the safe, space saving and productive handling of long and bulky loads.

COMBiLiFT

LIFTING INNOVATION




combilift.com



C-SERIES

C14,000

FRONT MODE

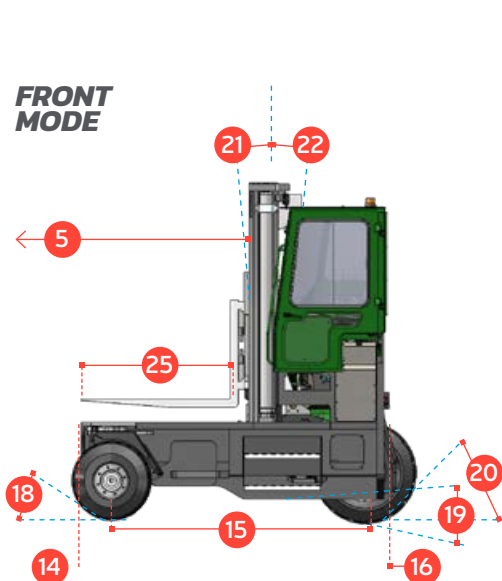


LATERAL MODE

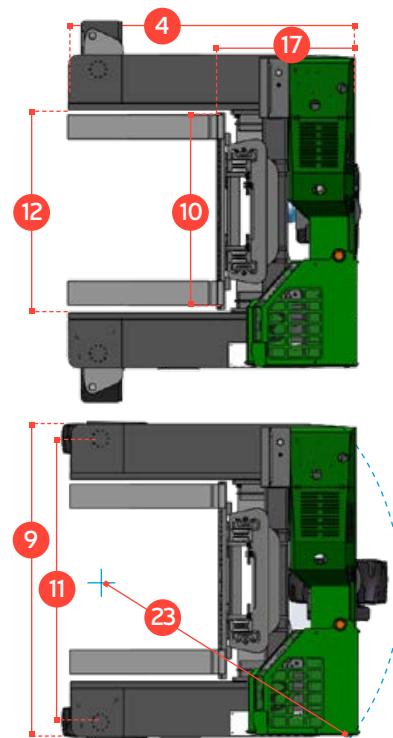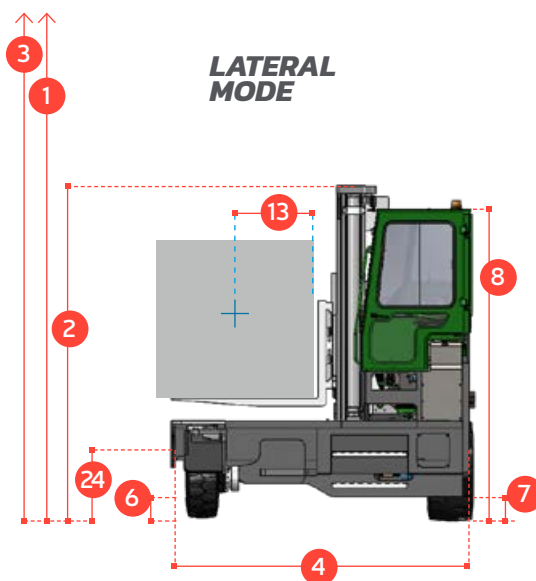

REF.	DESCRIPTION	C14,000
1a	Max. Lift Height	4100 mm
1b	Freelift Height	0 mm
2	Height Mast Closed	3450 mm
3	Max. (Mast raised)	5800 mm
4	Overall Length	3040 mm
5	Mast Travel	1660 mm
6	Ground Clearance Under Mast	385 mm
7	Ground Clearance to Centre of Wheelbase	255 mm
8	Height Over Cab (Without work lights)	3250 mm
9	Width	3560 mm
10	Outside Spread of Fork Arms	2100 mm
11	Track Front	3208 mm
12	Frame Opening	2210 mm
13	Load Centre Distance	600 mm
14	Overhang Front	305 mm
15	Wheelbase	2550 mm
16	Overhang Back	185 mm
17	Length From Face of Fork	1550 mm
18	Approach Angle	45°
19	Ramp Angle	29°
20	Departure Angle	45°
21	Forward Tilt	4°
22	Backward Tilt	8°
23	Minimum Outside Radius	3250 mm
24	Platform Height	980 mm
25	Platform Length	1490 mm

A	Capacity	14000kg
B	Unladen Weight	16500kg
C	Maximum Ground Speed	15km/h
D	Gradeability	15%
E	John Deere 4045 Diesel Engine	93kW
F	Electrics	12 Volt
G	Fork Section	65 mm x 250 mm 1490 mm
H	400 / 60 – 15 Front Tyre	OD 825 mm / Width 326 mm
I	465 / 55 - 20 Rear Tyre	OD 1016 mm / Width 457 mm
J	Standard Colour	Green & Grey
K	Suspension Seat	Gra mmar MSG65/521

Multidirectional

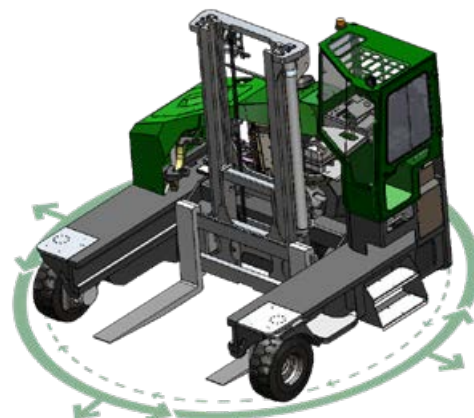

Features Include:

- Rubber Mounted Half Open Cabin
- Multi-Directional Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- Hydraulic Oil Cooler

Distributed By:

European Patent No. 2167416; Brazilian Patent No. P10811954-6; Australian Patent No. 2008253242

COMBILIFT TIENE UNA POLÍTICA DE DESARROLLO CONTINUO DE PRODUCTOS Y SE RESERVA EL DERECHO DE MODIFICAR LAS ESPECIFICACIONES SIN PREVIO AVISO. LAS ESPECIFICACIONES Y / O DIMENSIONES PUEDEN VARIAR DE LAS ILUSTRADAS

CO. MONAGHAN
IRELAND

+353 47 80500
INFO@COMBILIFT.COM

combilift.com